


MOSO® Bamboo X-treme® Outdoor Decking & Cladding accessories

MOSO® Fasteners

With these fasteners MOSO® Bamboo X-treme® Decking and Cladding can be easily installed. When installed correctly, there will be 5-6 mm gaps between the boards. The fasteners are supplied with matching stainless steel screws (square bit). For installation on aluminium sub frame joist (not provided by MOSO®), special screws are available.

| Product Code | Item | Material | Colour | Dimensions fastener (mm) | Dimensions screw (mm) |
|------------------|--|------------------------------|--------|--------------------------|-----------------------|
| CLIP-SCREW-BX08 | Fastener Asymmetric with screw (20 mm) | Stainless steel A2 (AISI304) | Brown | 27x22.5x10.8 | 4.5x30 |
| CLIP-BX08 | Fastener Asymmetric without screw (20 mm) | Stainless steel A2 (AISI304) | Brown | 27x22.5x10.8 | |
| CLIP-SCREW-BX031 | Fastener Symmetric with screw (20 mm) | Stainless steel A2 (AISI304) | Brown | 27x22.5x10.8 | 4.5x30 |
| CLIP-SCREW-BX301 | Fastener Start/End Side/Top with screw (20 mm) | Stainless steel A2 (AISI304) | Brown | 27x17x31 | 4.5x30 |
| CLIP-SCREW-BX801 | Fastener Start/End Top with screw (20 mm) | Stainless steel A2 (AISI304) | Brown | 29x25x11.2 | 4.5x30 |
| CLIP-SCREW-BX09 | Fastener Asymmetric with screw (18 mm) | Stainless steel A2 (AISI304) | Brown | 27x22.5x9.8 | 4.5x30 |
| CLIP-BX09 | Fastener Asymmetric without screw (18 mm) | Stainless steel A2 (AISI304) | Brown | 27x22.5x9.8 | |
| CLIP-SCREW-BX041 | Fastener Symmetric with screw (18 mm) | Stainless steel A2 (AISI304) | Brown | 27x22.5x9.8 | 4.5x30 |
| SCREW-09 | Screw for aluminium sub frame joist | Stainless steel A2 (AISI304) | Brown | | 4.2x20 |

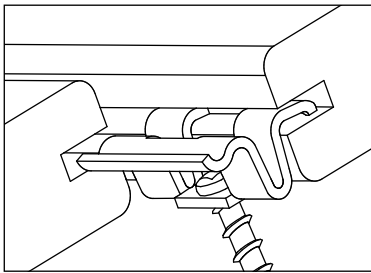

recommended number of fasteners/m²

decking*

137 mm
-20 pcs/m²

155 mm
-17 pcs/m²

178 mm
-14 pcs/m²

cladding**

137 mm
-14 pcs/m²

75 mm
-26 pcs/m²

*) Based on distance of 462.5 mm between the sub frame joist centres.

**) Based on distance of 600 mm between the sub frame joist centres.

CLIP-SCREW-BX08 / BX09
CLIP-BX08 / BX09



CLIP-SCREW-BX301



CLIP-SCREW-BX031 / BX041



CLIP-SCREW-BX801



MOSO® Bamboo X-treme® Sub frame joist

The MOSO® Bamboo X-treme® Sub frame joists are made of the same material as the decking boards: Thermo-Density® heat-treated bamboo.

| Product Code | Material | Finish | Dimensions (mm) |
|--------------|------------------------|------------|-----------------|
| BO-SB155 | Thermo-Density® bamboo | Unfinished | 2440x60x40 |



MOSO® Bamboo X-treme® Fascia board

The MOSO® Bamboo X-treme® Fascia board is intended for an elegant finish of the sides of the decking. It is placed vertically against the sides of the deck to cover the sub frame joists.

| Product Code | Material | Finish | Dimensions (mm) |
|--------------|------------------------|------------|-----------------|
| BO-DTHT162 | Thermo-Density® bamboo | Unfinished | 1850x137x20 |
| BO-DTHT171 | Thermo-Density® bamboo | Woca | 1850x137x20 |
| BO-DTHT184 | Thermo-Density® bamboo | Woca | 1850x137x18 |



maintenance & cleaning products

| Product Code | Material |
|-----------------|--|
| SEALER-04 | Sealer for ends of boards Sikkens Kodrin WV 457 0.25L |
| DISK-01 | 16" Silicon carbide disk |
| BROOM-01 | Silicon carbide broom |
| CLEANER-WOCA-01 | Woca Exterior Wood Cleaner |
| OIL-WOCA-011 | Woca Exterior Wood Oil Teak |
| WOCA-APPLICATOR | Woca Applicator set for oil |

Under the influence of wind, rain, sun and snow the decking will weather. MOSO® recommends impregnating and maintaining the pre-oiled decking with Woca maintenance materials. It is recommended to finish the unfinished decking with Woca Exterior Wood Oil right after installation, but no later than after the first winter. The silicon carbide broom and machine disk are perfectly suited to clean and smooth the decking surface of Bamboo X-treme® and to remove splinters due to the capability to sand the surface in addition to cleaning it.